

Manufacturer's Disclaimers and Limited Warranty

COMMUNICATION AND RESPONSE LIMITATIONS: Purchaser acknowledges that signals which are transmitted over telephone lines, or other modes of

communication pass through communication networks wholly beyond the control of The Manufacturer and are not maintained by The Manufacturer, and, therefore, The Manufacturer shall not be responsible for any equipment or communication failure which prevents transmission signals from reaching your contact list including emergency 911 operators or damages arising therefrom.

Purchaser acknowledges that The Manufacturer provides no response to the System's equipment. The equipment is designed to communicate with the a central station of your choice and The Manufacturer is not and shall not be responsible for ambulance, police or other emergency response time or that any response will be provided by the central monitoring station.

TESTING AND SERVICE OF THIS EQUIPMENT: The equipment, once installed, are in the exclusive possession and control of the Purchaser, and it is Purchaser's sole responsibility to test the operation of equipment and request warranty service if the equipment is under warranty.

PURCHASER'S EXCLUSIVE REMEDY: Purchaser's exclusive remedy for The Manufacturer's default hereunder is to require The Manufacturer to repair or replace, at

The Manufacturer's option, any equipment or part of the personal emergency alert system which is non-operational during The Manufacturer's warranty period.

LIMITATION OF LIABILITY: This equipment is not designed or guaranteed to prevent any loss or injury. This Limited Warranty and Disclaimer of Liability constitutes the terms of sale and use of the equipment, and if there should arise any liability on the part of The Manufacturer as a result of any cause whatsoever, regardless of whether or not such loss, damage, or personal injury was caused by or contributed to by The Manufacturer's negligence to any degree or failure to perform any obligation or strict products liability, such liability will be limited to an amount paid by the Purchaser to The Manufacturer for the product, or to the sum of \$350.00, whichever is greater.


For warranty information, see your dealer for details.

CARETAKERSENTRY Quick Install Guide

Instructions for Adding a Waterproof Pendant to Your CaretakeSentry



Base Back View

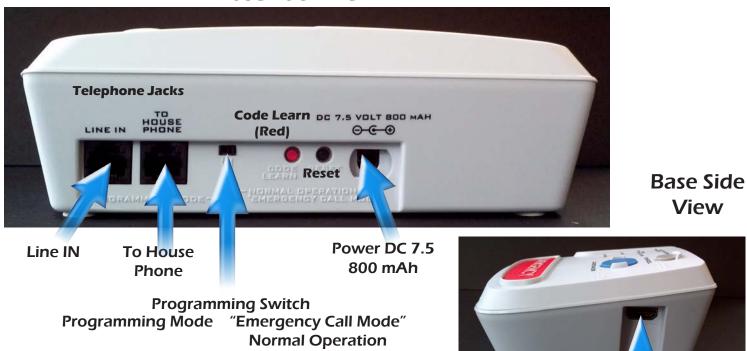

Accessory Jack

Step-by-Step Installation Guide



Confirm Accessories in Kit







Wrist Strap (Shown with waterproof pendant)



Test the Unit

Performing a System Test

- a. PUSH and HOLD the CANCEL button for 8-10 seconds to enter "System Check"
- b. Push GRAY EMERGENCY button for **2 seconds** on Pendant (**RED LED on the pendant should turn ON for 1 second**)
- c. Listen for voice prompt from base unit:
- i. "All Systems are OK Battery is OK" is heard if the system is correctly installed
- ii. If any other voice prompt is heard, the unit will describe the problem
- d. Push and release the CANCEL button for 1 second to exit Test Mode (unit will automatically exit in 3 minutes)
- e. We recommend that you perform this System Test weekly

Place call to Emergency Operator:

- a. Push GRAY EMERGENCY button for 2 seconds on Pendant (RED LED on the pendant should turn ON for 1 second)
- b. You should hear a dial tone, dialing and then communication tones between the CaretakerSentry and central station. Several seconds later the operator should answer the call
- c. Talk normally to the base unit just like speaker phone
- d. At the end of the conversation, the CaretakerAlert should automatically hang-up if not, push the CANCEL button for 1 second

On the Base Unit


a. PUSH and RELEASE the RED Code Learn button on back of base unit. You will hear a voice prompt, "Pendant Learning."

Teach the Pendant to the

System

On the Pendant

- a. PUSH the GRAY Emergency button until you hear, "Pendant Learning" from the base. Then, release the button on the pendant.
- i. If you hear, "Base and Pendant out of Range," STOP wait 30 seconds and begin step 2 again.
- b. When pendant learning has been successful, you will hear, "Pendant Code Learned," and then it will announce the call setting that the base is set to Programming Mode or Emergency Call Mode.

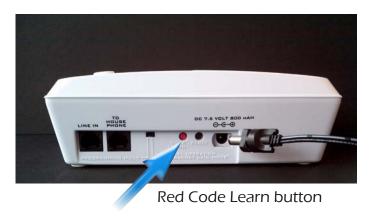

*NOTES:

Erasing all previously learned pendants – hold down the (Red) Code Learn button for 8 seconds. You will hear the confirmation of "Erasing All Pendants, All Pendants Erased" from the base unit. Now you can re-teach pendants starting at Step #2.

Lost Pendants – If a pendant has been lost, follow the note for "Erasing all previously learned pendants" and then re-teach all of the pendants starting at Step #2.

Teaching additional pendants - does not erase previously learned pendants.

Exiting Learning Mode - Base will automatically exit the pendant learning mode after successfully learning the pendant or after the base announces "Pendant Learning Failed".

Up to 9 waterproof pendants can be taught to each base.

